

DGT20I

"DGT20I": IP68 STAINLESS STEEL WEIGHT TRANSMITTER / INDICATOR



Weight indicator/transmitter with AISI 304 stainless steel multifunction case that guarantees an IP68 degree of protection both on bench and panel installations. Suitable for heavy industrial applications, for dosage, filling and level control systems.

Approvals:

CE-M EN 45501, OIML R-76, OIML R-61 (MID), OIML R-51 (MID), Australian approval

Working in cooperation with:

SVENSKA VAG AB

SJOUDEVAGEN 5 - SE-352 46 - VAXJO - SWEDEN
Tel. 0046 470 72 40 60 Fax. 0046 470 478 44
info@svenskavag.se

The best solution
for advanced industrial
applications

MAIN FEATURES

- Easy to use 5-key waterproof keyboard.
- Highly efficient red LED display with 6 20-mm digits and 6 LEDs for showing active functions.
- New AISI304 stainless steel multifunction protective case, which allows:
 - Wall or bench installation via standard swivel bracket
 - Panel installation with IP68 degree of protection both front and rear, ideal for the chemical, pharmaceutical and food industry and harsh environments.
 - Easy cabling, inspection and maintenance with front panel removal system.
- IP68 degree of protection, with both bench and panel installation.
- Dimensions 212x169,5x91mm, fitted with support bracket for table or wall mounting.
- Theoretical calibration.
- Up to 8 signal linearization points with DINITOOLS (3 from keypad).
- Calibration, Set-Up parameters, configurable from keyboard or from PC with DINI TOOLS.
- Up to 10.000e OIML or 2 x 3000e @ 0,3 $\mu\text{V/e}$ CE-M legal for trade.
- Up to 800.000 displayable divisions with internal resolution up to 3.000.000 points.
- A/D 24-bit sigma-delta conversion, up to 400 conv./sec. autoselect.
- Connectable with up to 8 analogue load cells with 350 Ohm input resistance.
- Management of a digitally equalised 4-cell weighing system or management of 4 independent weighing systems.
- DGT20I / DGT20IAN:
Power supply from 12Vdc to 24Vdc. With external power unit 110/230Vac - 12Vdc and IP68 connector. EU, UK, US, AU plugs included as standard.
- DGT20IPW:
Internal power unit 110/230Vac.

MAIN CERTIFICATIONS

- CE-M EN 45501
- OIML R76
- OIML R61 - MID
- OIML R51
- Australian legal for trade certificate of approval (NMI S788)

TRANSMITTER / INDICATOR: FUNCTIONS

- **THROUGH KEYBOARD:**
Zeroing; Semi automatic and presettable tare, print and/or data transmission; ON/Stand-by.
- **SELECTABLE:**
High Resolution Weighing x 10; Net/Gross or lb/kg conversion; Weighs totalisation; Formulation; Counting; In/Out Truck weighing; Hold e Peak.
- **EXTERNAL INPUT:**
Simulation of key pressure; Keyboard lock.
- **MOSFET OUTPUT:**
Set Point Control on the weight, either positive (in loading) or negative (in unloading), or on the pieces (counting mode), with programmable enabling/disabling thresholds, as direct check or upon weight stability.
- **SERIAL PORTS:**

On all models: Reading of the net, gross, and tare weights; Clearing; Semi automatic and presettable tare; Scale switch; Setting of outputs activation thresholds.

DGT20I and DGT20IAN models: Reading of microvolts or ADC converter for all the channels; Message display; Printing; Setting of APW in counting mode; Simulation of key pressure; MODBUS ASCII and RTU serial protocol.
- **THROUGH 16 bit ANALOGUE OUTPUT (DGT20IAN):**
Analogue output proportional to the net or gross weight, either positive (in loading) or negative (in unloading).

I/O SECTION

- RS232/C bidirectional port (RJ11 connector) configurable for connection to external units.
- RS485 bidirectional port configurable for network connection.
- 2 photomosphet outputs 150 mA 48 Vac/150 mA 60 Vdc (NO) with configurable functions.
- 2 inputs (optoisolator photocouplers) 12 ÷ 24 Vdc, 5 mA min - 20 mA max, with configurable functions.
- 16-bit analogue output (DGT20IAN model) 4-20mA, 0-5Vdc choice or 0-10 Vdc. Maximum load applicable to the current output: 300 Ohm. Minimum load applicable to live output: 1K Ohm.

MASTER/REPEATER OPTION (MSTSLV code)

- A specific programme for using the indicator as a universal or multi-scale weight repeater (MASTER) in combination with DFW/DGT/MCW.

OPERATING MODES:

- Multi-scale repeater (MASTER):
mode that allows up to 32 independent scales to be repeated, with the ability to manage their functions, or to display and print the sum of the weights of all the scales.

UNIVERSAL weight repeater:

mode that allows weight repetition of any scale, by configuring the input string.

- For further details, [Click here](#).

DETAIL 1




DGT20IPW

DETAIL 2



DGT20IPW

DETAIL 3

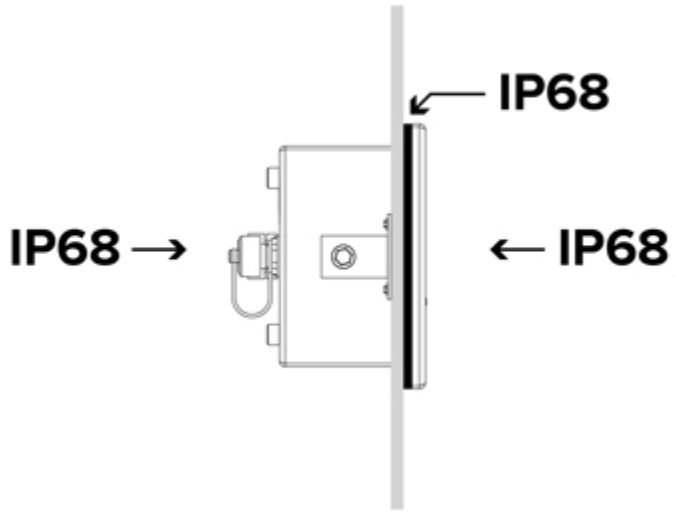



www.diniargeo.com



“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO
FRANCE sarl
France

DINI ARGEO
GMBH
Germany

DINI ARGEO
UK Ltd
United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
China

DINI ARGEO
OCEANIA
Australia



COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano - Modena - Italy
Tel. +39.0536 843418

SVENSKA VAG AB

SJOUDEVAGEN 5 - SE-352 46 - VAXJO - SWEDEN

Tel. 0046 470 72 40 60 Fax. 0046 470 478 44

info@svenskavag.se

SALES AND TECHNICAL ASSISTANCE SERVICE